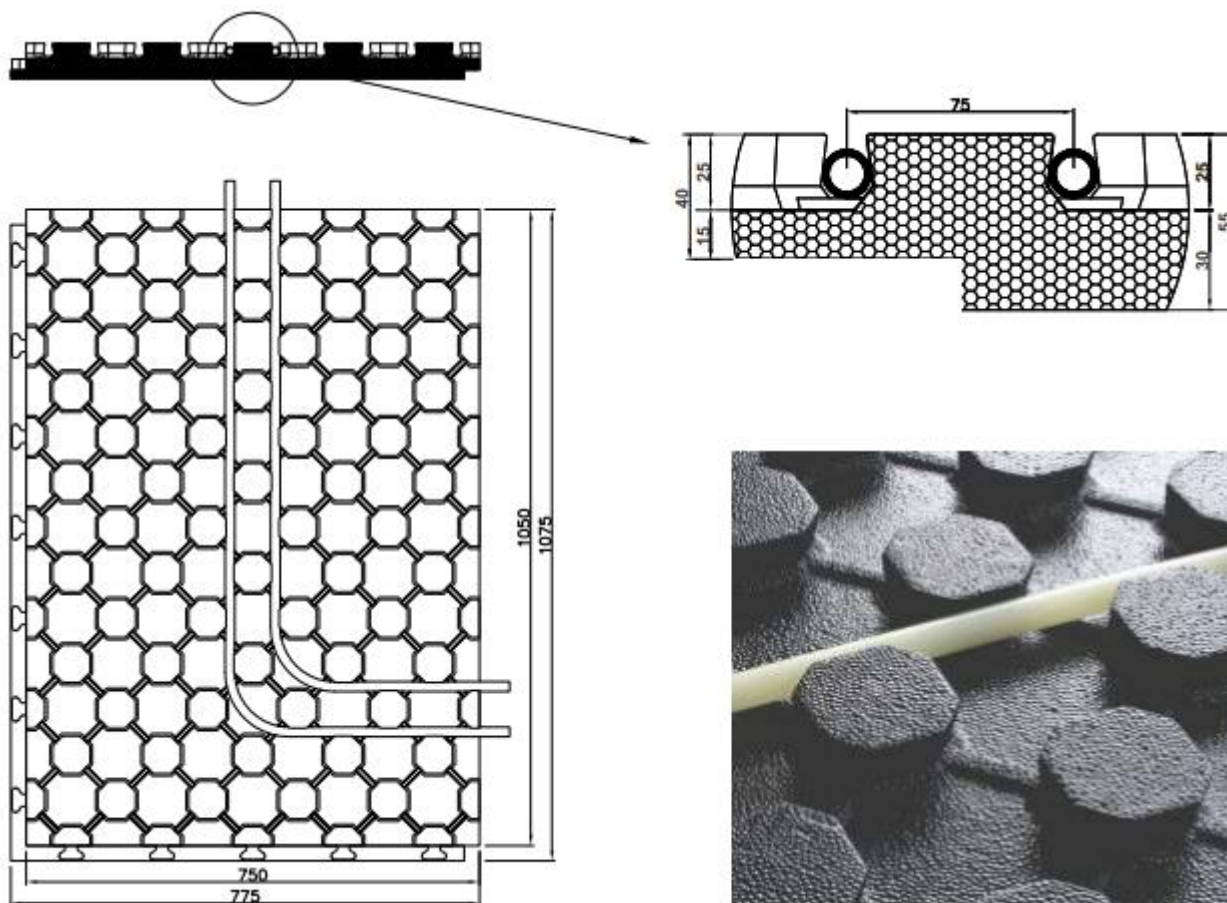


# STIROTERMAL BASIC 15/30

**FRAGMAT**


## TEHNIČNI PODATKI- TECHNISCHE DATEN- TECHNICAL DATA

Premer cevi – Rohrdurchmesser – Pipe diameter:	16-20 mm
Razdalja med cevmi – Verlegeabstand – Pipe spacing:	75, 150, 225 mm
Izolacijski material – Dämmstoff – Insulation material:	EPS
Oznaka – Bezeichnung – Designation:	<b>Basic 15: EPS-EN 13163-L(3)-W(3)-T(2)-S(2)-P(5)-BS200-CS(10)120-DS(N)5-DS(70,-)2</b> <b>Basic 30: EPS-EN 13163-L(3)-W(3)-T(2)-S(5)-P(5)-BS200-CS(10)120-DS(N)5-DS(70,-)2</b>
Koristna velikost – Nutzgröße – Usable size:	1050 x 750 mm
Koristna površina – Nutzoberfläche – Usable surface:	0.79 m <sup>2</sup>
Skupna velikost – Gesamtgröße – Total size:	1075 x 775 mm
Skupna debelina – Gesamtdicke – Total tickness:	40 / 55 mm
Skupna debelina izolacije – Gesamtisolationdicke – Total insulation tickness:	15 / 30 mm
Koeficient toplotne prevodnosti – Wärmeleitfähigkeit – Thermal resistance factor:	0.036 W/mK
Toplotna upornost plošče – Wärmedurchlasswiderstand – Heat admission resistance:	0.40 / 0.80 m <sup>2</sup> K/W
Tlačna trdnost (10% def.) – Druckspannung (bei 10% Stauchung) – Compressive stress (10 % def.):	120 kPa
Dovoljena obtežba – Zulässige Druckbelastbarkeit – Acceptable load:	24kPa≈ 2400 kg/m <sup>2</sup>
Temp. obstojnost oblike – Wärmeformbeständigkeit – Heat form resistance:	80 °C
Razred gorljivosti – Brandverhalten – Fire classification – EN 13501-1 / DIN 4102:	E/ B1
Folija (material, debelina) – Folie (Stoff, Dicke) – Foil (material, tickness):	PS 0.18 mm
Barva folije – Folienfarben – Foil colour:	črna- schwarz- black
Pakiranje kartonska škatla [kos] – Verpackung Karton [Stück] – Packaging carton box [pcs]- 1145x795x600 mm	<b>Basic 15: 21→ 16.54 m<sup>2</sup></b> <b>Basic 30: 13→ 10.24 m<sup>2</sup></b>
Pakiranje PE folija [kos] – Verpackung PE Folie [Stück] – Packaging PE foil [pcs]- 1140x 780x 450 mm	<b>Basic 15: 14→ 11.03 m<sup>2</sup></b> <b>Basic 30: 10→ 7.88 m<sup>2</sup></b>

\*Izdelek je v skladu z EN 131363:2013+A1:2015 in Uredbo (EU) št.305/2011.

Izjava o lastnostih: Basic 15: **DoP-04-TI - 006 / 21-01**, Basic 30: **DoP-04-TI - 007/21-01**.